

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 291 969 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.03.2003 Bulletin 2003/11

(51) Int Cl.7: **H01Q 13/08**, **H01Q 3/24**,
H01Q 21/20(21) Application number: **02292005.2**(22) Date of filing: **09.08.2002**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**IE IT LI LU MC NL PT SE SK TR**

Designated Extension States:

AL LT LV MK RO SI

• Thudor, Mr. Franck

35000 Rennes (FR)

• Le Bolzer, Mrs. Françoise

35000 Rennes (FR)

• Minard, Mr. Philippe

35700 Rennes (FR)

(30) Priority: **04.09.2001 FR 0111399**

(71) Applicant: Thomson Licensing S.A.

92100 Boulogne-Billancourt (FR)

(74) Representative: Ruellan-Lemonnier, Brigitte

THOMSON multimedia,**46 quai A. Le Gallo****92648 Boulogne Cédex (FR)**

(72) Inventors:

• Louzir, Mr. Ali


35000 Rennes (FR)

(54) **Switched slot antenna**

(57) The present invention relates to a device for receiving and/or transmitting signals comprising an assembly of n means for receiving and/or transmitting waves with longitudinal radiation of the printed slot-antenna type, where n is an integer greater than or equal

to one, and an excitation means of the microstrip-line type coupled to at least one slot line.

The present invention is characterized in that it comprises a switching device which acts by controlling the coupling between the microstrip line and at least one slot line.

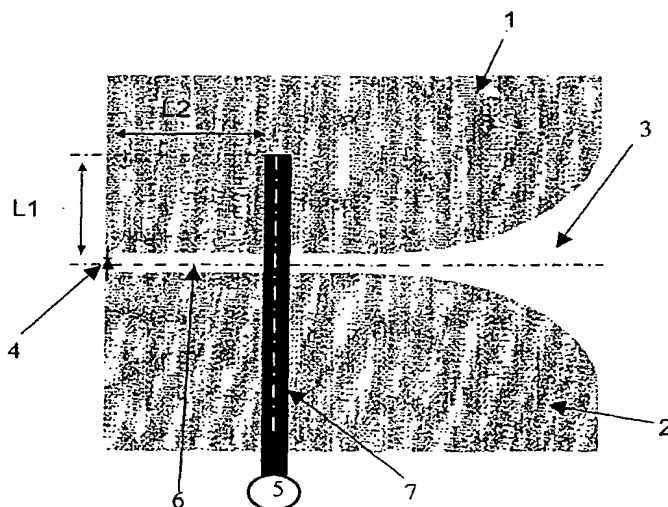**Fig.1**

Description

[0001] The present invention relates to a switching device for apparatuses for receiving and/or transmitting signals which can be used more especially in the field of wireless transmissions.

[0002] In known systems for high-throughput wireless transmissions, which can be used especially in a domestic environment, the signals sent by the transmitter reach the receiver along a plurality of separate paths. At the receiver, this results in interference capable of causing fading and distortions of the transmitted signal and consequently a loss or deterioration of the information to be transmitted. To overcome this drawback, directional antennas of the horn, reflector or array type are usually used, these antennas being used for transmission and/or reception and making it possible to combat or attenuate the deterioration related to multiple paths. Specifically, apart from the gain afforded by the directional antenna, the latter makes it possible, by spatial filtering, on the one hand to reduce the number of multiple paths, and hence to reduce the amount of fading, and on the other hand to reduce the interference with other systems operating in the same frequency band.

[0003] Since directional antennas do not allow significant azimuthal spatial coverage, French Patent No. 00 15715 filed in the name of the applicant therefore proposed a compact sectorial antenna based on Vivaldi-type antennas. This antenna consists of a "centrifuge" circular arrangement of n Vivaldi-antenna-type printed radiating elements (n being an integer greater than 2), making it possible to present several directional beams sequentially over time. The set of beams provides complete 360° coverage of space.

[0004] The switching operation is carried out by virtue of a switch external to the antenna. In general, this switch consists of diodes combined with power-adder/divider circuits and control electronics comprising at least n ports, making it possible to select one or more Vivaldi antennas from the n elements. To ensure acceptable performance in terms of matching, more than one diode is often used on each port. Furthermore, losses from the power-adder/divider circuits are added to the coupling losses of the slotline-microstrip line transition needed for exciting Vivaldi antennas. Finally, the diode state (on or off) is controlled by bias voltages. In order to be able to isolate the voltages provided on each port, circuits blocking the DC current (DC block) are used. These introduce additional losses.

[0005] Thus this switching function is often expensive as a result of the price of diodes and the production costs and bulky because of the biasing circuits and the power-adder/divider circuits. Moreover, it introduces not inconsiderable power losses: losses in the divider/adder circuits, losses due to the DC-block and losses in the diodes. These losses result, on reception, in an increase in the noise temperature of the receiver and, on transmission, in a dry loss of the power to be transmitted, which requires overdimensioning of the power amplifier, which may present a very significant additional cost.

[0006] The aim of the present invention is therefore to propose a switching device for apparatuses for receiving and/or transmitting signals, making it possible to reduce the cost, the overall size and the various losses.

[0007] Consequently, a subject of the present invention is a device for receiving and/or transmitting signals comprising :

- an assembly of n means for receiving and/or transmitting waves with longitudinal radiation of the slot-antenna type, where n is an integer greater than or equal to one,
- an excitation means electromagnetically coupled to at least the slot of one antenna; and
- a switching device that acts by controlling the electromagnetic coupling between the excitation means and at least one slot of the slot antenna,

characterized in that the switching device comprises:

- at least one means for producing a reversible electrical contact between two metallized surfaces defining one slot of the slot antenna (for the description this involves diodes); and
- a means for controlling the state of the aforementioned contact.

[0008] According to one embodiment, the excitation means consists of a microstrip-type supply line. According to a variant, it may consist of a coplanar-type line.

[0009] According to another embodiment, the slot antenna consists of at least one slot, printed on a substrate, one end of which flares gradually up to the edge of this substrate while the other end, which is not closed either, extends to another edge of the substrate.

[0010] According to another embodiment, the slot antennas are regularly arranged around a single, coplanar point, so as to be able to radiate in a sector with an angle of 360°.

[0011] Other characteristics and advantages of the present invention will become apparent on reading the description of the various embodiments, this description being given below with reference to the appended drawings, in which :

- Figure 1 shows the switching device for a slot antenna;
- Figure 2 shows a switching device for a circular arrangement of slot antennas;
- Figure 3 shows a switching device for a circular arrangement of slot antennas including the control means.

[0012] Figure 1 shows schematically a Vivaldi-type antenna printed on a substrate 3. The structure and the performance of the Vivaldi antenna are well known to a person skilled in the art and are described especially in documents "IEEE Transactions on Antennas and Propagation" by S. Prasad and S. Mahapatra, Volume 2 AP-31 No. 3, May 1983 and "Study of discontinuities in open waveguide — application to improvement of radiating source model" by A. Louzir, R. Clequin, S. Toutain and P. G  lin, Lest Ura CNRS No. 1329. The supply for the Vivaldi antenna of Figure 1 is based on the use of a transition between a supply line of the microstrip 7 type and a slot 6. To optimize transmission of energy from the microstrip line to the slot, the unflared end of the slot extends perpendicularly to the microstrip line by a length L_2 of about, at the operating frequency, $k'\lambda_s/4$ from the microstrip line with $\lambda_s = \lambda_0/\sqrt{\epsilon_{1\text{reff}}}$ (with λ_0 being the wavelength in vacuo and $\epsilon_{1\text{reff}}$ the effective relative permittivity of the slot) and k' an odd integer. As for the microstrip line, it extends to an open circuit located at a length L_1 of about $k\lambda_m/4$ from the slot where $\lambda_m = \lambda_0/\sqrt{\epsilon_{\text{reff}}}$ (with λ_0 being the wavelength in vacuo and ϵ_{reff} the effective relative permittivity of the line) and k is an odd integer. The other end of the microstrip line is connected to means 5 for transmitting and/or receiving signals of known type, which especially comprise a power amplifier. For fuller details on optimizing the coupling, reference may be made to document "Slot-line transitions" by Knorr, IEEE, MTT, Vol. 22, pp. 548-554, May 1974 and to document "A Novel MIC Slot-Line Antenna" by Prasad and Mahapatra. Under the conditions described above and presented in Figure 1, in order to produce the coupling, the unflared end of the slot located at the length $k'\lambda_s/4$ from the microstrip line must terminate in a short circuit. If this end terminates in an open circuit then there is no coupling between the microstrip line and the slot. The invention is based on this control of the coupling.

[0013] In order to simulate a short circuit or an open circuit, the end of the slot is not metallized and a device 4, which makes it possible to simulate the short circuit or the open circuit described above, is placed across the slot at a length of about $k'\lambda_s/4$. In Figure 1, a diode 4 has been positioned, but this could just as well be any other switch, such as for example a diode-mounted transistor or MEMs (microelectromechanical systems). According to the theory developed by Knorr, dimensioning of the slot antenna with quarter wavelengths makes it possible, at the crossover of the microstrip line and of the slot, to produce the impedance opposite that located a quarter wavelength further on: for example, the open circuit located at the end of the microstrip line is equivalent to a short circuit located at the crossover. Furthermore, line theory makes it possible to confirm that the coupling is maximum when, at the crossover, the equivalent impedance of the microstrip line is a short circuit and that of the slot is an open circuit. Thus, the coupling takes place when the diode is on, that is to say when the slot has an open circuit at the crossover and when the microstrip line has a short circuit at the crossover. Conversely, there is no coupling when the diode is off. It is therefore possible to control the coupling and therefore the operation of the antenna by controlling the bias of the diode. To this end, all that is required is to apply carefully chosen biases to the metallized surfaces 1 and 2. For example, it is possible to choose to apply, to the plate 2, either the bias V_{cc} greater than V , the bias voltage of the diode, if it is desired that it be on, or to connect the surface 2 to earth if it is desired that the diode be off, the surface 1 already being connected to earth.

[0014] Thus a switching device is provided, comprising a control circuit which is simple since it controls the application of two biases to metallized surfaces, compact and inexpensive since it consists of a single diode.

[0015] An improvement to the present invention is to produce a slot antenna providing 360° sequential coverage of space.

[0016] French Patent No. 00 15715, filed in the name of the applicant, proposes a compact antenna making it possible to increase the spectral efficiency of the array by reusing the frequencies by virtue of segmenting the physical space to be covered by the radiation pattern of the sectorial antenna. The antenna proposed in French Patent Application No. 00 15715 consists of a coplanar circular arrangement around a central point of Vivaldi-type printed radiating elements making it possible to present several directional beams sequentially over time, the set of beams giving complete 360° coverage of space.

[0017] The receiving and/or transmitting means consist of a microstrip line or a coplanar line crossing all the slots of the printed slot antennas constituting the receiving and/or transmitting means, the length L_3 of the line between two slots being equal, at the central operating frequency of the system, to $k\lambda_m/2$ and the length L_4 of the line between one end of the line and a slot being about $\lambda_m/4$ where $\lambda_m = \lambda_0/\sqrt{\epsilon_{\text{reff}}}$ (with λ_0 being the wavelength in vacuo and ϵ_{reff} the effective relative permittivity of the line) and k is an integer. Preferably, the length of the line between two slots is equal to $k\lambda_m$ so as to obtain in-phase operation of the printed slot antennas.

[0018] In this case, the crossover between the slot of the printed slot antenna and the line is preferably produced, at the central operating frequency of the system, at a distance L_5 of about $k'\lambda_s/4$ from the lower end of the slot with $\lambda_s = \lambda_0/\sqrt{\epsilon_{1\text{reff}}}$ (λ_0 being the wavelength in vacuo and $\epsilon_{1\text{reff}}$ the effective relative permittivity of the slot) and k' an odd integer.

[0019] The improvement proposed here relates to the switching system proposed in the previous patent application

and consists of an extension of the principle proposed in the present invention to several antennas. The present improvement in fact consists in integrating this switching system directly with the antenna so as to decrease the overall size and the power losses associated with the switching function. The external system (5, 9) which makes it possible to choose the reception or transmission mode of the antenna, which is carried out directly on the microstrip line, will not be described in detail, and only the switching means will be described below.

[0020] Unlike French Patent Application No. 00 15715, the lower ends of the slots forming the Vivaldi antennas of the present improvement do not terminate in short circuits: the centre of the overall antenna is free from metallization, which makes it possible to isolate the various metallized plates (M12, M23, M34, M41) forming the slots (A1, A2, A3, A4) and therefore to terminate each one of them with an open circuit. The switching is then carried out by controlling the electromagnetic coupling between the microstrip line and the exciter slot of the Vivaldi-type antenna. The switching principle remains the same as for a single-slot antenna, and is still produced by placing a diode (D1, D2, D3, D4) or any other switch across the slot at a distance of about $k'\lambda_s/4$ from the microstrip line (k' being an odd integer) forming each antenna and making it possible to connect the two metallized surfaces forming the antenna. The switching between the input/output microstrip line to one of the receiving/transmitting, respectively, Vivaldi antennas is controlled by setting the diodes corresponding to the chosen antenna to the on state and by keeping the other diodes in the off state. Switching of the diodes themselves is carried out by applying bias potentials (V12, V23, V34, V41) to the various metallized surfaces (M12, M23, M34, M41, respectively). By varying the biases of two consecutive surfaces, the diode connecting these two surfaces can be rendered either off or on. The description may be extended to the case of n slots (n being an integer greater than or equal to 1) and, in addition, it is possible to choose to render m antennas (m being an integer strictly less than n) of the n antennas present active.

[0021] The simple four-slot example, as in Figure 2, will be taken to illustrate the selection in reception or in transmission of the Vivaldi antenna A1. The switching between the input/output microstrip line 8 towards the Vivaldi antenna A1 is controlled by setting the diode D1 to the on state and by keeping the diodes D2, D3, D4 in the off state. This is made possible by applying a bias voltage to each metallized surface. Thus, the surface M12 is set to the potential V12, M23 to V23, M34 to V34 and M41 to V41. In fact, when the bias potential difference (V12-V41) is such that the diode D1 is in the on state (that is, for example (V12-V41) > V1, where V1 is the bias voltage of the diode D1), the diode is equivalent to a short circuit. For the other diodes, the potential difference is less than the bias voltage of the diodes. To simplify the circuit 10 for controlling the bias potentials, all that is required is to apply a potential Vcc > V1 to the surface M12 and to connect all the other surfaces to the earth of the circuit. By applying the principles of coupling between a microstrip line 8 and a slot, mentioned in the description of the present invention, under the conditions described above, the coupling is maximum at the antenna A1 and minimum at the three other antennas A2, A3 and A4. Thus a single antenna from the four was selected in transmission or in reception so as to transmit or receive, respectively. The selection of one antenna out of four is illustrated by the table below with reference to Figure 3, which gives the values of potential to apply to the various metallized surfaces in order to effect switching:

		Potential applied to plates Mij			
		M12	M23	M34	M41
Excited slot	A1	Vcc	0	0	0
	A2	0	Vcc	0	0
	A3	0	0	Vcc	0
	A4	0	0	0	Vcc

[0022] The device needed for the present improvement consists of 4 diodes, which are placed across the slots, and

of a small control circuit, which makes it possible to manage the various potentials of the metallized surfaces. This device 10 may be inserted in the middle of the antenna since the latter consists of substrates, so as to limit the length of the connection wires as much as possible. The complete switching device is therefore very compact and reduces losses because of the small number of diodes and the simplicity of the circuit controlling the bias potentials.

[0023] According to an improvement of the present invention, it is possible, furthermore, to choose to render m antennas (m being an integer strictly less than n) from the n antennas present active. It is possible to again take the simple example given above with four slots and to choose to make two of these slots active at the same time. All that is then needed is to again take the same assembly as described above and to modify the control circuit so that it can apply, for the four-slot example, three different potentials: a zero potential, that is to say to connect the metallized surface to earth, a potential V_{cc} with V_{cc} greater than the largest of the bias voltages of the diodes if they are different, and a potential equal to twice V_{cc} . The table below makes it possible to illustrate this selection of two slots out of four, with reference to Figure 3, by giving the values of potentials to apply to the various plates in order to select the desired slots:

		Potential applied to plates M_{ij}			
		M12	M23	M34	M41
Excited slots	A1 and A2	V_{cc}	$2 \cdot V_{cc}$	0	0
	A1 and A3	V_{cc}	0	V	0
	A1 and A4	$2 \cdot V_{cc}$	0	0	V_{cc}
	A2 and A3	0	V_{cc}	$2 \cdot V_{cc}$	0
	A2 and A4	0	V_{cc}	0	V_{cc}
	A3 and A4	0	0	V_{cc}	$2 \cdot V_{cc}$

[0024] Thus a relatively simple system for switching between the various slots of the complete antenna is obtained since the control circuit is reduced to a voltage selector that can be inserted into the middle of the metallized surfaces as in Figure 3 so as to reduce the overall size of the circuit. In addition, the power losses are reduced to those due to the coupling, which cannot be modified, and to those due to the bias of the diodes, the number of which is less than that of the switching devices proposed in the prior art.

[0025] It is obvious for a person skilled in the art that the embodiments described above may be modified, especially with regard to the number of Vivaldi antennas or the type of supply to the structure, etc., without departing from the scope of the claims below.

Claims

1. Device for receiving and/or transmitting signals comprising :

- an assembly of n means for receiving and/or transmitting waves with longitudinal radiation of the slot-antenna type, where n is an integer greater than or equal to one (6 ; A1, A2, A3 A4);
- an excitation means electromagnetically coupled to at least the slot of one antenna (7 ; 8); and

a switching device that acts by controlling the electromagnetic coupling between the said excitation means and at least one slot of the slot antenna, **characterized in that** the switching device comprises

EP 1 291 969 A1

- at least one means (4, D1, D2, D3, D4) for producing a reversible electrical contact between two metallized surfaces defining one slot of the slot antenna; and
- a means (10) for controlling the state of the aforementioned contact.

- 5 2. Device according to Claim 1, **characterized in that** the said excitation means consists of a supply line of coplanar-line type or of microstrip-line type.
3. Device according to either of Claims 1 and 2, **characterized in that** the slot antenna consists of at least one slot, printed on a substrate (3), one end of which flares gradually up to the edge of this substrate while the other end,
10 which is not closed either, extends to another edge of the substrate (3).
4. Device according to Claims 2 and 3, **characterized in that** the crossover between a slot of the printed slot antenna and the microstrip line occurs, at the central operating frequency of the system, at a distance (L2, L5) of about $k'\lambda_s/4$ from the unflared end of the slot where $\lambda_s = \lambda_0/\sqrt{\epsilon_{1\text{reff}}}$ (λ_0 being the wavelength in a vacuum and $\epsilon_{1\text{reff}}$ is the effective relative permittivity of the slot) and k' is an odd integer.
15
5. Device according to any one of Claims 2 to 4, **characterized in that** the line length (L1, L4) between one end of the microstrip line and a slot is about $k\lambda_m/4$ where $\lambda_m = \lambda_0/\sqrt{\epsilon_{\text{reff}}}$ with λ_0 being the wavelength in vacuo and ϵ_{reff} the effective relative permittivity of the microstrip line and k is an odd integer.
20
6. Device according to Claim 1, **characterized in that** the n means (A1, A2, A3, A4) for receiving and/or transmitting waves with longitudinal radiation of the printed slot-antenna type are arranged to receive a broad azimuthal sector.
7. Device according to Claim 6, **characterized in that** the switching device makes it possible to render n means for receiving and/or transmitting waves with longitudinal radiation of the printed slot-antenna type from the n means present active at the same time, where m is an integer less than n .
25
8. Device according to either of Claims 6 and 7, **characterized in that** the slot antennas are regularly arranged around a single, coplanar point, so as to be able to radiate in a sector with an angle of 360° .
30
9. Device according to Claim 1, **characterized in that** the means for producing a reversible electrical contact between two metallized surfaces defining a slot of the slot antenna are placed through the slot at a distance close to $k'\lambda_s/4$ from the microstrip line, with $\lambda_s = \lambda_0/\sqrt{\epsilon_{1\text{reff}}}$ (λ_0 being the wavelength in a vacuum and $\epsilon_{1\text{reff}}$ the effective relative permittivity of the slot) and k' is an odd integer.
35
10. Device according to Claim 9, **characterized in that** a means for producing a reversible electrical contact between two metallized surfaces defining a slot of the antenna is a control switch (4, D1, D2, D3, D4).
11. Device according to Claim 10, **characterized in that** a means for producing a reversible electrical contact between two metallized surfaces defining a slot of the antenna is a diode, a diode-mounted transistor or a MEMs (microelectromechanical System).
40
12. Device according to Claim 11, **characterized in that** the means (10) for controlling the state of the reversible contact of a slot is the application of a potential to the two metallized surfaces defining this slot, allowing the controlled switch to close.
45
13. Device according to any one of Claims 1 to 12, **characterized in that** the slot antenna is of the Vivaldi-antenna type.
- 50
- 55

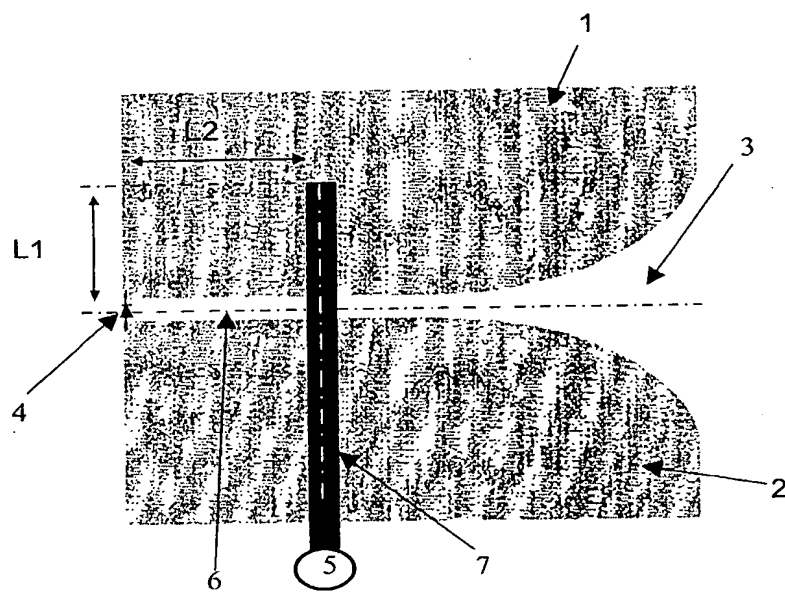


Fig.1

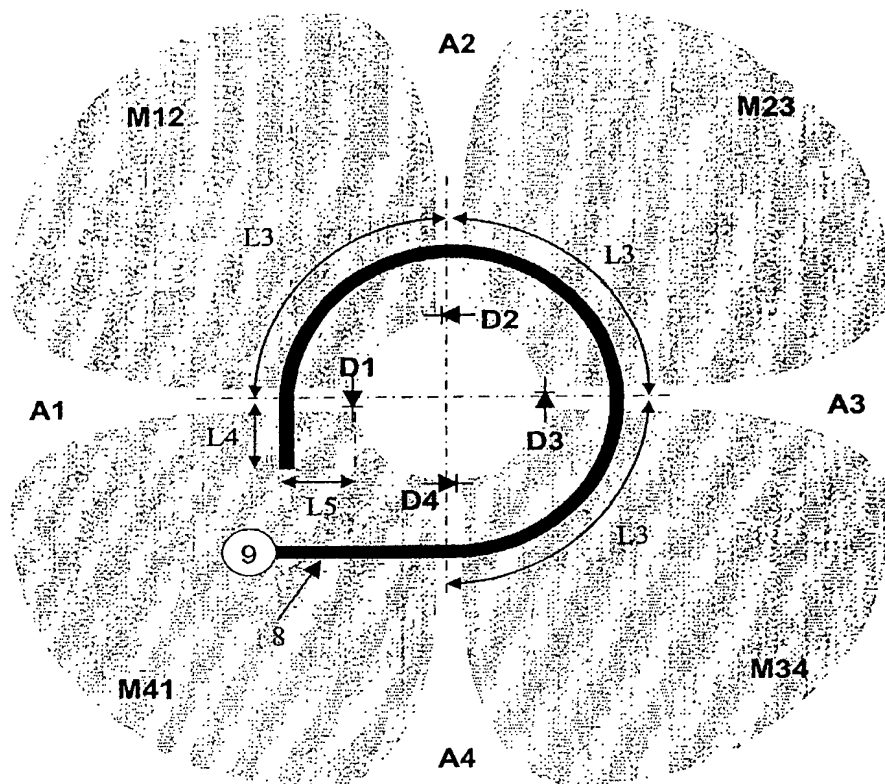


Fig.2

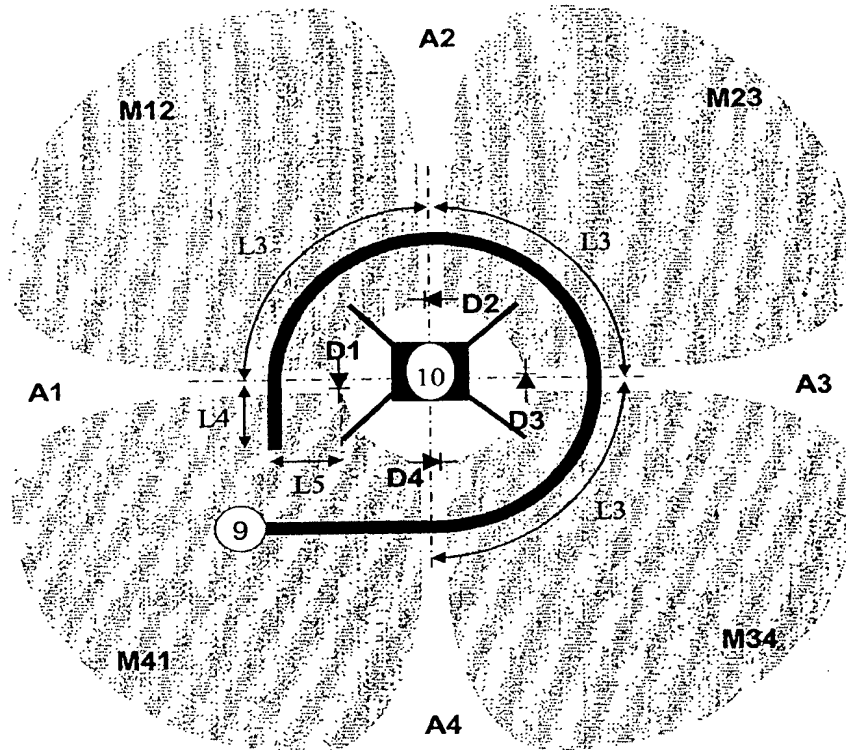


Fig.3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 29 2005

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	SIEVENPIPER D ET AL: "Low-profile, four-sector diversity antenna on high-impedance ground plane" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 16, 3 August 2000 (2000-08-03), pages 1343-1345, XP006015569 ISSN: 0013-5194 * the whole document *	1-8,13	H01Q13/08 H01Q3/24 H01Q21/20
A	EP 0 685 901 A (AT & T CORP) 6 December 1995 (1995-12-06) * column 2-4; figure 1 *	1-5,13	
D,A	JEFFREY B KNORR: "Slot-Line Transitions" IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES, vol. 22, May 1974 (1974-05), pages 548-554, XP002199674 * the whole document *	2,4,5	
A	VAUGHAN M J ET AL: "28 GHZ OMNI-DIRECTIONAL QUASI-OPTICAL TRANSMITTER ARRAY" IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES, IEEE INC. NEW YORK, US, vol. 43, no. 10, 1 October 1995 (1995-10-01), pages 2507-2509, XP000530205 ISSN: 0018-9480 * the whole document *	1,6,8,13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01Q
P,D, A	FR 2 817 661 A (THOMSON MULTIMEDIA SA) 7 June 2002 (2002-06-07) * the whole document *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 December 2002	Examiner Ribbe, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 503 03.82 (P04C01)

EP 1 291 969 A1

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 29 2005

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-12-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0685901	A	06-12-1995	CA	2147399 A1	02-12-1995
			EP	0685901 A2	06-12-1995
			JP	7336134 A	22-12-1995

FR 2817661	A	07-06-2002	FR	2817661 A1	07-06-2002
			AU	2073902 A	18-06-2002
			WO	0247205 A1	13-06-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**

THIS PAGE BLANK (USPTO)